

# MHD mixed convective flow of power-law nanofluid in a lid-driven cavity with heat generation and chemical reaction effects: Buongiorno's Model

Nor Raihan Mohamad Asimoni <sup>a</sup>, Nurul Farahain Mohammad <sup>a,\*</sup>, Abdul Rahman Mohd Kasim <sup>b</sup>, Sharidan Shafie <sup>d</sup>

<sup>a</sup> Department of Computational and Theoretical Sciences, Kulliyah of Science, International Islamic University Malaysia, 25200 Kuantan, Pahang, Malaysia

<sup>b</sup> Faculty of Industrial Sciences & Technology, University Malaysia Pahang, 26300 Gambang, Kuantan, Pahang, Malaysia

<sup>c</sup> Department of Mathematical Sciences, Faculty of Science, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

\* Corresponding author: [farahain@iiu.edu.my](mailto:farahain@iiu.edu.my)

## Article history

Received 22 August 2019

Revised 8 February 2020

Accepted 10 Mac 2020

Published Online 20 October 2020

## Abstract

The two-dimensional laminar MHD mixed convective flow of non-Newtonian power-law nanofluid in a lid-driven cavity with the presence of heat generation and chemical reaction effects is analyzed. The nanofluid incorporates the effects of Brownian motion and thermophoresis using Buongiorno's model. The governing equations in a vector form are transformed into non-dimensional form. Then, the dimensionless equations are solved numerically by finite element method (FEM) using automated solution technique which is FEniCS. The effects of different physical parameters on velocity, temperature, and nanoparticles volume fraction profiles are presented and discussed in this paper.

**Keywords:** MHD, power-law nanofluid, cavity, Buongiorno, FEniCS

© 2020 Penerbit UTM Press. All rights reserved

## INTRODUCTION

Nanofluid has been used to increase the rate of heat transfer in many applications [1]. There are two popular approaches in studying nanofluid which are Buongiorno's model [2] and Tiwari and Das' model [3]. Our research focuses on flow in square cavity using Buongiorno's model. Brownian motion and thermophoresis effects are considered in this model.

Since we focus on mixed convective flow in lid-driven cavity, there are several papers that investigated this problem. Sheremet et al. [4] mentioned that different Richardson number affects the heat and mass transfer mechanisms in cavity. Besides, Yu et al. [5] stated that no significant changes on streamlines, isotherms and isoconcentrations when Brownian motion and thermophoresis parameter increased.

Currently, magnetohydrodynamics (MHD) has been considered in the study of convective flow filled with nanofluid in cavity for example wavy-walled cavity [6], square cavity [7] and lid-driven cavity [8,9]. Elshehaby et al. [8] performed a numerical study on MHD convective flow of nanofluid in lid-driven cavity with sinusoidal temperature distribution on both vertical walls while Alsabery et al. [9] investigated nanofluid in a doubled lid-driven cavity. Both of them considered inclined magnetic field effect and found that increasing Hartmann number leads to decrease fluid motion.

Chemical reaction is important since there is no pure air or water without foreign mass in it [10]. However, very limited literature is available on chemical reaction effects in cavity since it consider mass

transfer problem. Rashad et al. [11] reported the study on the unsteady natural convective flow in a porous cavity with thermal radiation and chemical reaction effects. They found that chemical reaction can decrease Nusselt number and decrease Sherwood number. Mondal & Sibanda [12] extended [11] by adding the inclined magnetic fields in inclined cavity. Zhuang et. al [13] studied effects of chemical reaction in porous cubic cavity filled with power-law fluid. They summarized that chemical reaction effects is more significant on the shear-thinning fluids rather than shear thickening fluids. Aly [14] solved porous cavity filled with nanofluid with chemical reaction effects.

Several papers considered heat generation/absorption effect in mixed convective flow of nanofluid using Tiwari and Das' model [15,16] and Buongiorno's model [17]. Rashad et al [15] demonstrated MHD mixed convective flow in a porous lid-driven cavity filled with nanofluid and presented that increment in heat generation/absorption parameter increases the velocity and temperature distributions. Hussain et al. [16] focused on MHD mixed convective flow of nanofluid in double lid-driven cavity and obtained the result where an enhancement of heat transfer occurred by increasing the heat generation/absorption parameter. Shekar et al. [17] investigated natural convection for nanofluid in a porous square cavity and found that local Nusselt number and skin friction decrease with the increasing of heat generation /absorption parameter.

All papers mentioned above used Newtonian fluid as a base fluid. In this study, we focus on non-Newtonian fluid. Some papers have explored convective flow of non-Newtonian nanofluid in a cavity

[18,19,20]. Kefayati [19] proposed mixed convective flow of non-Newtonian nanofluid in a lid-driven cavity. The results exhibited that when power-law index increases, heat and mass transfer decrease at  $Ri = 1$ . Besides, heat transfer decreases and mass transfer increases with the enhancement of Brownian motion and thermophoresis effects. Kefayati & Tang [20] performed MHD natural convective flow in cavity and showed that heat and mass transfer decline as Hartmann number rises.

The effects of magnetic field, heat generation/absorption and chemical reaction on mixed convective flow of power-law nanofluid using Buongiorno's mathematical model in a lid-driven cavity has not been considered yet. In this study, this problem is solved by finite element method using automated solution technique which is FEniCS [21]. FEniCS is an open source package that enable us to solve partial differential equations problem in vector form using Python language.

## MATHEMATICAL FORMULATION

### Governing equations

Steady two-dimensional MHD mixed convective flow of power-law nanofluid in a lid-driven cavity is explored. Heat generation/absorption and chemical reaction effects are taken into account and Buongiorno's model for nanofluid is considered. Let  $\Omega$  be a bounded domain. The flow of configuration is shown through diagram below.

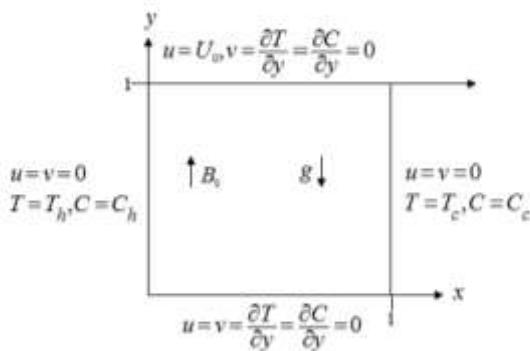


Fig. 1 Flow configuration with  $\Omega = [0,1] \times [0,1]$ .

Following [2,22,23], the governing equations for this problem are:

Continuity Equation for Nanofluid:

$$\nabla \cdot \mathbf{u} = 0 \quad (1)$$

Continuity Equation for Nanoparticles:

$$\mathbf{u} \cdot \nabla C = D_B \nabla^2 C + \left( \frac{D_T}{T_\infty} \right) \nabla^2 T + \kappa_0 (C - C_\infty) \quad (2)$$

Momentum Equation:

$$\rho_f (\mathbf{u} \cdot \nabla) \mathbf{u} = \nabla \cdot \tau_{ij} - \nabla p - \sigma B_0^2 \mathbf{u} + \left[ (\rho_p - \rho_f) (C - C_\infty) - (1 - C_\infty) \rho_f \beta (T - T_\infty) \right] \mathbf{g} \quad (3)$$

Energy Equation:

$$\mathbf{u} \cdot \nabla T = \alpha \nabla^2 T + \tau \left[ D_B \nabla C \cdot \nabla T + \left( \frac{D_T}{T_\infty} \right) \nabla T \cdot \nabla T \right] + \frac{Q_0}{(c\rho)_f} (T - T_\infty) \quad (4)$$

where  $\mathbf{u} = (u, v)$  is the fluid velocity,  $C$  is the nanoparticle volume fraction,  $D_B$  is the Brownian diffusion coefficient,  $D_T$  is the thermophoretic diffusion coefficient,  $T$  is the fluid temperature,  $\kappa_0 (C - C_\infty)$  represents chemical reaction where  $\kappa_0$  is the reaction rate,  $\tau_{ij}$  is a viscous stress for power-law fluid with

$$\tau_{ij} = K \left( \frac{e_{ij} e_{ij}}{2} \right)^{\frac{n-1}{2}} \nabla \cdot e_{ij} \text{ and } e_{ij} = (\nabla \mathbf{u} + \nabla \mathbf{u}^T), \sigma \text{ is the electrical conductivity of the fluid, } B_0 \text{ is the magnetic field strength, } \rho_f \text{ is the density of the base fluid, } \rho_p \text{ is the density of the nanoparticles and}$$

$\mathbf{g} = (0, -g_y)$  is gravity acceleration applied to the flow,  $\alpha = \frac{k}{(c\rho)_f}$

with  $k$  is thermal conductivity of nanofluid and  $c_f$  is the heat capacitance of the base fluid,  $\tau = \frac{(c\rho)_p}{(c\rho)_f}$  with  $c_p$  is the heat

capitance of the nanoparticles and  $Q_0$  is the dimensional heat generation/absorption coefficient.

The governing equations are subjected to initial and boundary conditions:

$$\begin{aligned} u = 0, \quad v = 0, \quad C = C_h, \quad T = T_h, \quad \text{for } x = 0, 0 \leq y \leq 1 \\ u = 0, \quad v = 0, \quad C = C_c, \quad T = T_c, \quad \text{for } x = 1, 0 \leq y \leq 1 \\ u = 0, \quad v = 0, \quad \frac{\partial C}{\partial y} = 0, \quad \frac{\partial T}{\partial y} = 0, \quad \text{for } y = 0, 0 \leq x \leq 1 \\ u = U_0, \quad v = 0, \quad \frac{\partial C}{\partial y} = 0, \quad \frac{\partial T}{\partial y} = 0, \quad \text{for } y = 1, 0 \leq x \leq 1 \end{aligned} \quad (5)$$

Next, Equations (1) – (4) are converted to non-dimensional form, using the following dimensionless parameters [2, 24]:

$$\mathbf{x} = \frac{\bar{\mathbf{x}}}{L}, \quad \mathbf{u} = \frac{\bar{\mathbf{u}}}{U}, \quad p = \frac{\bar{p}}{\rho U^2}, \quad \nabla = L \bar{\nabla}, \\ \theta = \frac{T - T_\infty}{T_w - T_\infty}, \quad \phi = \frac{C - C_\infty}{C_w - C_\infty}, \quad t = \frac{U}{L} \bar{t}$$

The dimensionless governing equations can be written as follows:

$$\nabla \cdot \mathbf{u} = 0 \quad (6)$$

$$\mathbf{u} \cdot \nabla \phi = \frac{1}{\text{Re} \text{Le} \text{Pr}} \left( \nabla^2 \phi + \frac{Nt}{Nb} \nabla^2 \theta \right) + \kappa \phi \quad (7)$$

$$(\mathbf{u} \cdot \nabla) \mathbf{u} = \frac{1}{\text{Re}} \left( \frac{e_{ij} e_{ij}}{2} \right)^{\frac{n-1}{2}} \nabla \cdot e_{ij} - \nabla p - M \mathbf{u} + Ri (\theta - Nr \phi) \quad (8)$$

$$\mathbf{u} \cdot \nabla \theta = \frac{1}{\text{Re}} \frac{1}{\text{Pr}} \nabla^2 \theta + Nb \nabla \phi \cdot \nabla \theta + Nt \nabla \theta \cdot \nabla \theta + Q \theta \quad (9)$$

with corresponding dimensionless parameters defined as [24]:

$$\begin{aligned} \text{Re} &= \frac{\rho L^n U^{2-n}}{K}, \text{Pr} = \frac{K}{\rho \alpha U^{1-n} L^{n-1}}, \text{Le} = \frac{\alpha}{D_B}, \\ Nb &= \frac{\tau D_B (C_w - C_\infty)}{UL}, Nt = \frac{\tau D_T (T_w - T_\infty)}{T_\infty UL}, \\ Nr &= \frac{(\rho - \rho_{f\infty})(C_w - C_\infty)}{\rho(1 - C_\infty)\beta(T_w - T_\infty)}, M = \frac{\sigma B^2 L}{\rho U}, \\ Ri &= \frac{L}{U^2} (1 - C_\infty) \beta g (T_w - T_\infty), \kappa = \frac{L}{U} \kappa_0, Q = \frac{Q_0 L}{c \rho U} \end{aligned} \quad (10)$$

where  $\text{Re}$  is Reynolds number,  $\text{Pr}$  is Prandtl number,  $\text{Le}$  is Lewis number,  $Nb$  is Brownian motion parameter,  $Nt$  is thermophoresis parameter,  $Nr$  is buoyancy ratio,  $Ri$  is Richardson number,  $M$  magnetic parameter, and  $\kappa$  is dimensionless chemical reaction parameter. It is called destructive reaction if  $\kappa > 0$  and generative reaction if  $\kappa < 0$ . Chemical reaction involves endothermic and exothermic process where heat is generated or absorbed [25]. It is called heat generation if  $Q > 0$  and heat absorption if  $Q < 0$  where  $Q$  is dimensionless heat generation/absorption parameter. However, if the level of species concentration is very low, heat generation/absorption is ignored [26].

The dimensionless equations are subjected to dimensionless initial and boundary conditions:

$$\begin{aligned} u &= 0, v = 0, \phi = 1, \theta = 1, \quad \text{for } x = 0, 0 \leq y \leq 1 \\ u &= 0, v = 0, \phi = 0, \theta = 0, \quad \text{for } x = 1, 0 \leq y \leq 1 \\ u &= 0, v = 0, \frac{\partial \phi}{\partial y} = 0, \frac{\partial \theta}{\partial y} = 0, \quad \text{for } y = 0, 0 \leq x \leq 1 \\ u &= 1, v = 0, \frac{\partial \phi}{\partial y} = 0, \frac{\partial \theta}{\partial y} = 0, \quad \text{for } y = 1, 0 \leq x \leq 1 \end{aligned} \quad (11)$$

## Weak formulation

In order to solve this problem using finite element method, variational form is constructed using galerkin weighted residual approach for the discretization of governing equations. Taylor Hood element is considered to mesh the domain for the Navier-Stokes equation where  $V$  is continuous quadratic polynomial function and  $P$  is continuous linear polynomial function. Meanwhile, continuous quadratic polynomial function  $L$  is used for the continuity equation for nanoparticles and heat transfer equation. The space should be mixed function space  $W = V \times P \times L \times L$ . Equations (5) – (8) are multiplied by the test functions and integrated over the domain  $\Omega = [0, 1] \times [0, 1]$ . We have  $\mathbf{u}, p, \theta$  and  $\phi$  as functions and  $\mathbf{v}, q, s$  and  $r$  as test functions such that  $\mathbf{u}, \mathbf{v} \in V, p, q \in P, \theta, s \in L$  and  $\phi, r \in L$ .

Weak form can be written as

$$\int_{\Omega} (\nabla \cdot \mathbf{u}) q = 0 \quad (12)$$

$$\int_{\Omega} (\mathbf{u} \cdot \nabla \phi) r + \frac{1}{\text{Re} \text{Le} \text{Pr}} \nabla \phi \nabla r + \frac{1}{\text{Re} \text{Le} \text{Pr} Nb} \nabla \theta \nabla r - \kappa \phi r = 0 \quad (13)$$

$$\int_{\Omega} (\mathbf{u} \cdot \nabla) \mathbf{u} \cdot \mathbf{v} + \frac{1}{\text{Re}} \left( \frac{e_{ij} e_{ij}}{2} \right)^{\frac{n-1}{2}} e_{ij} \cdot \nabla \mathbf{v} + p \nabla \mathbf{v} + M \mathbf{u} \cdot \mathbf{v} + Ri Nr \phi \cdot \mathbf{v} - Ri \theta \cdot \mathbf{v} = 0 \quad (14)$$

$$\int_{\Omega} (\mathbf{u} \cdot \nabla \theta) s + \frac{1}{\text{Re} \text{Pr}} \nabla \theta \nabla s - Nb (\nabla \phi \cdot \nabla \theta) s - Nt (\nabla \theta \cdot \nabla \theta) s - Q \theta s = 0 \quad (15)$$

Then, Equations (10) – (13) are solved using fully coupled approach and expressed in Python programming. Finally, the solution is obtained using FEniCS package [27].

## RESULTS AND DISCUSSION

In this section, we present the investigation of mixed convective flow in a lid-driven cavity that is filled with power-law nanofluid by considering magnetic field, chemical reaction and heat generation/absorption effects. Equations (10) – (13) are solved numerically using FEniCS and the post-processing of solutions obtained is interpreted using matplotlib. The dimensionless parameter  $\text{Pr} = 1, \text{Re} = 10, Ri = 1, Nb = Nt = Nr = 0.1$  and  $\text{Le} = 1$  is fixed throughout the computation. We demonstrate velocity, temperature and nanoparticle volume fraction profiles at four cases which are:

- 1) different power-law indexes ( $n = 0.6, 1, 1.6$ )
- 2) different magnetic parameters ( $M = 0, 5, 10$ )
- 3) different heat generation/absorption parameters ( $Q = -0.2, 0, 0.2$ )
- 4) chemical reaction parameters ( $\kappa = -0.2, 0, 0.2$ )

The present code is validated by the results obtained with some earlier studies on the mixed convective flow of Newtonian fluid in a lid-driven cavity and considered isothermal top moving lid and isothermal bottom unmoving lid.

**Table 1** Comparison of present velocity at the middle of the cavity for different Re ( $Gr = 100, Pr = 0.71$ ).

	Iwatsu et.al [2]	Khanafer & Chamkha [24]	Bakar et al. [25]	Present
Re = 100				
$u_{\min}$	-0.2037	-0.2122	-0.2049	-0.2078
$u_{\max}$	1.0000	1.0000	1.0000	1.0000
$v_{\min}$	-0.2448	-0.2506	-0.2328	-0.2477
$v_{\max}$	0.1699	0.1765	0.1673	0.17482
Re = 400				
$u_{\min}$	-0.3197	-0.3099	-0.3023	-0.3123
$u_{\max}$	1.0000	1.0000	1.0000	1.0000
$v_{\min}$	-0.4459	-0.4363	-0.4219	-0.4335
$v_{\max}$	0.2955	0.2866	0.2802	0.2873

The grid independence test has been conducted and the results are presented in Table 2. It is shown that grid size of  $200 \times 200$  gives insignificant difference with grid size of  $250 \times 250$ . Hence, we use  $200 \times 200$  grid size to execute all results.

**Table 2** Grid Independence Test ( $Ri = 1, Pr = 1, n = 1, M = 0, Nr = Nb = Nt = 0.1, Le = 1, Q = 0, \kappa = 0$ )

Mesh	$u_{\min}$	$v_{\min}$	$T_{\min}$	$C_{\min}$
$50 \times 50$	-0.21075	-0.43177	0	-0.10442
$100 \times 100$	-0.21237	-0.43844	0	-0.10325
$150 \times 150$	-0.21293	-0.4407	0	-0.10286
$200 \times 200$	-0.21320	-0.44186	0	-0.10269
$250 \times 250$	-0.21336	-0.44255	0	-0.10260
$300 \times 300$	-0.21347	-0.44298	0	-0.10253

Fig. 2 – 3 display the velocity, temperature and nanoparticle volume fraction profiles for different power-law indexes at constant  $M = 5$ ,  $Q = -0.2$  and  $\kappa = 0.2$ . We demonstrate three types of fluid which are shear thinning fluid ( $n = 0.6$ ), Newtonian fluid ( $n = 1$ ) and shear thickening fluid ( $n = 1.6$ ). It can be seen that in Fig 3, where we focus the profiles in the middle of cavity ( $y = 0.5$ ), increasing power-law index will lead to small decreasing pattern for temperature and nanoparticle volume fraction profiles. Meanwhile, two trends occur for velocity profile where it enhances when  $x < 0.5$  and declines when  $x > 0.5$ . However, it is observable for velocity and temperature profiles in Fig. 2, where both of them show the increasing pattern at the top lid as power-law index increases due to the effects of external forces by the moving lid.

Besides, Fig. 4 – 5 illustrate the velocity, temperature and nanoparticle volume fraction profiles for different magnetic parameter  $M$  at constant  $n = 0.6$ ,  $Q = -0.2$  and  $\kappa = 0.2$ . Fig. 5 presents that by increasing magnetic parameter, velocity profiles decreases at  $x < 0.5$  and increases at  $x > 0.5$ , while temperature and nanoparticle volume fraction profiles show slight increasing pattern. Meanwhile, different pattern is shown in Fig. 4. It shows the velocity and temperature profiles are decreasing as magnetic parameter increases at the top moving lid area where the effects of magnetic retards the flow of the fluid.

The influence of heat generation/absorption on the velocity, temperature and nanoparticle volume fraction profile at constant  $n = 0.6$ ,  $M = 5$  and  $\kappa = 0.2$  is presented in Fig. 6 – 7. We investigate heat absorption ( $Q = -0.2$ ), heat generation ( $Q = 0.2$ ) and no heat generation/absorption ( $Q = 0$ ). It demonstrates that the temperature profile enhances and nanoparticle volume fraction declines due to rising heat generation/absorption parameter. Interestingly, velocity profile shows slight increases at  $0.3 \leq x \leq 0.7$ .

Lastly, Fig. 8 – 9 reveal the effects of chemical reaction parameter on the velocity, temperature and nanoparticle volume fraction profiles at constant  $n = 0.6$ ,  $M = 5$  and  $Q = -0.2$ . The results show that increasing chemical reaction parameter can enhance the nanoparticle volume fraction profile.


## CONCLUSION

In this paper, steady two-dimensional mixed convective flow of power-law nanofluid in lid-driven cavity with the presence of magnetic field, heat generation/absorption and chemical reaction effects was considered. The dimensionless governing equations were solved using finite element method in FEniCS. It was found that:


- Increasing power-law index lead to decreasing temperature profile while velocity profile increases at  $x < 0.5$  and decreases at  $x > 0.5$  in the middle of cavity ( $y = 0.5$ ).
- Velocity and temperature profiles decrease as magnetic parameter increases near the moving lid.
- Influence of rising the heat generation/absorption parameter can enhance temperature profile but decline nanoparticle volume fraction profile.
- As chemical reaction parameter increases, nanoparticle volume fraction profile increase.

## ACKNOWLEDGEMENT


The authors would like to acknowledge the Research Management Centre-IIUM (C-RIG18-004-0004) and Research Management Centre-UTM (vote numbers 07G70, 07G72, 07G76 and 07G77) for the financial support provided for this research.

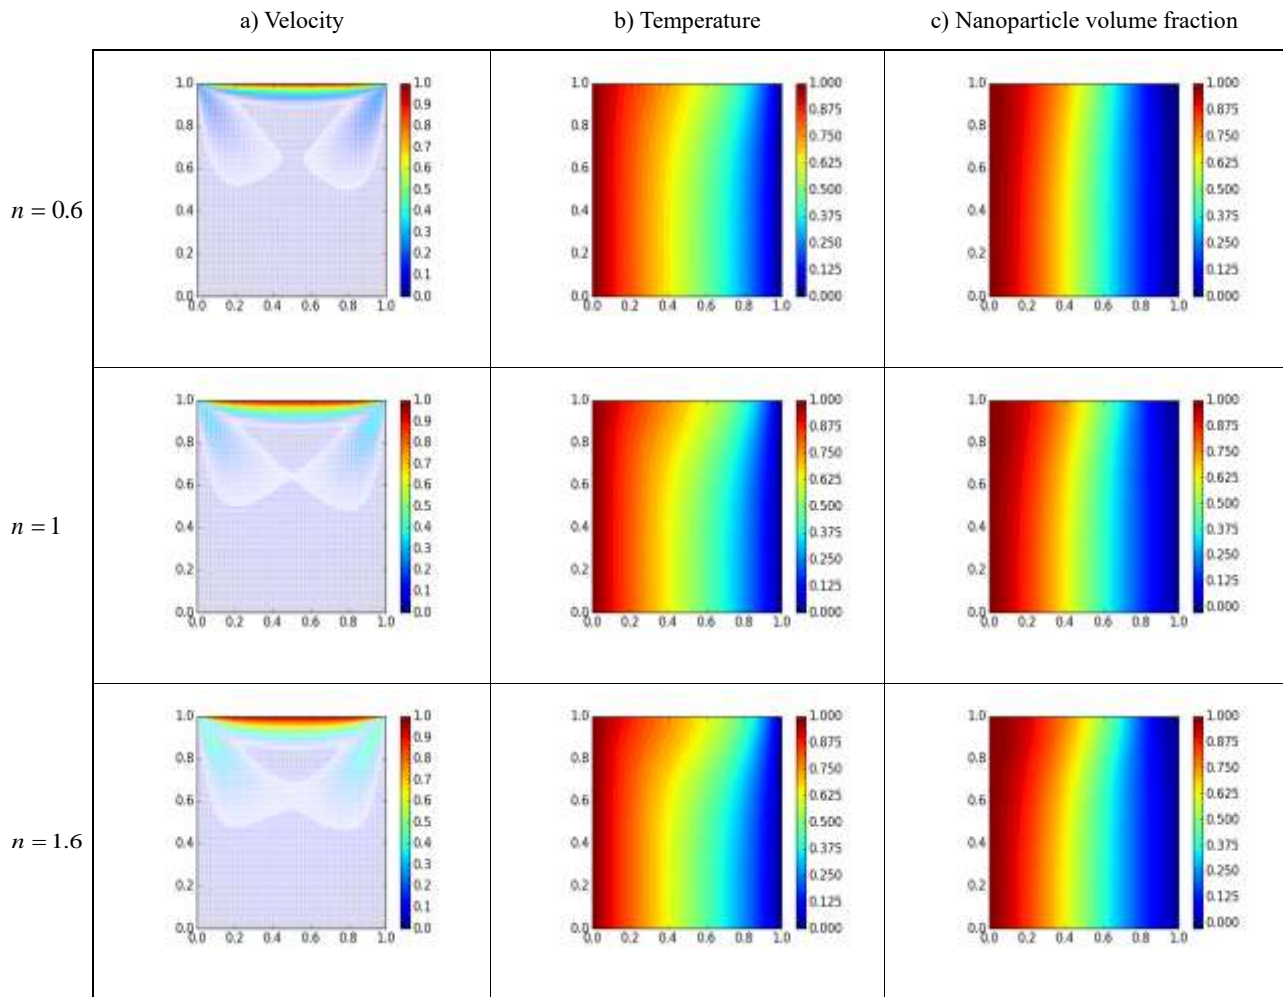


**Fig. 2** Comparison of a) velocity, b) temperature and c) nanoparticle volume fraction profiles for different power-law indexes at  $Ri = 1, Pr = 1, Nb = Nt = Nr = 0.1, Le = 1, M = 5, Q = -0.2, \kappa = 0.2$

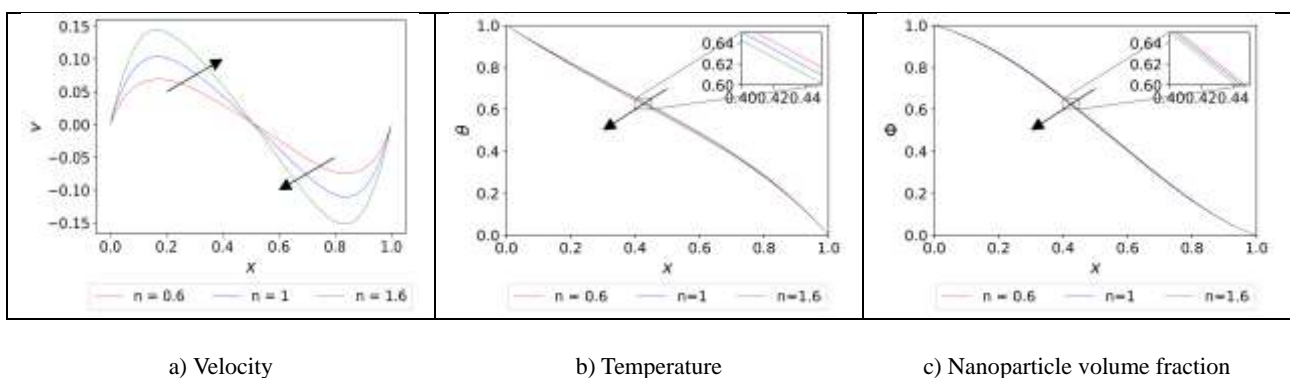

**Fig. 3** Comparison of a) velocity, b) temperature and c) nanoparticle volume fraction profiles for different power-law indexes in the middle of cavity ( $y = 0.5$ ) at  $Ri = 1, Pr = 1, Nb = Nt = Nr = 0.1, Le = 1, M = 5, Q = -0.2, \kappa = 0.2$

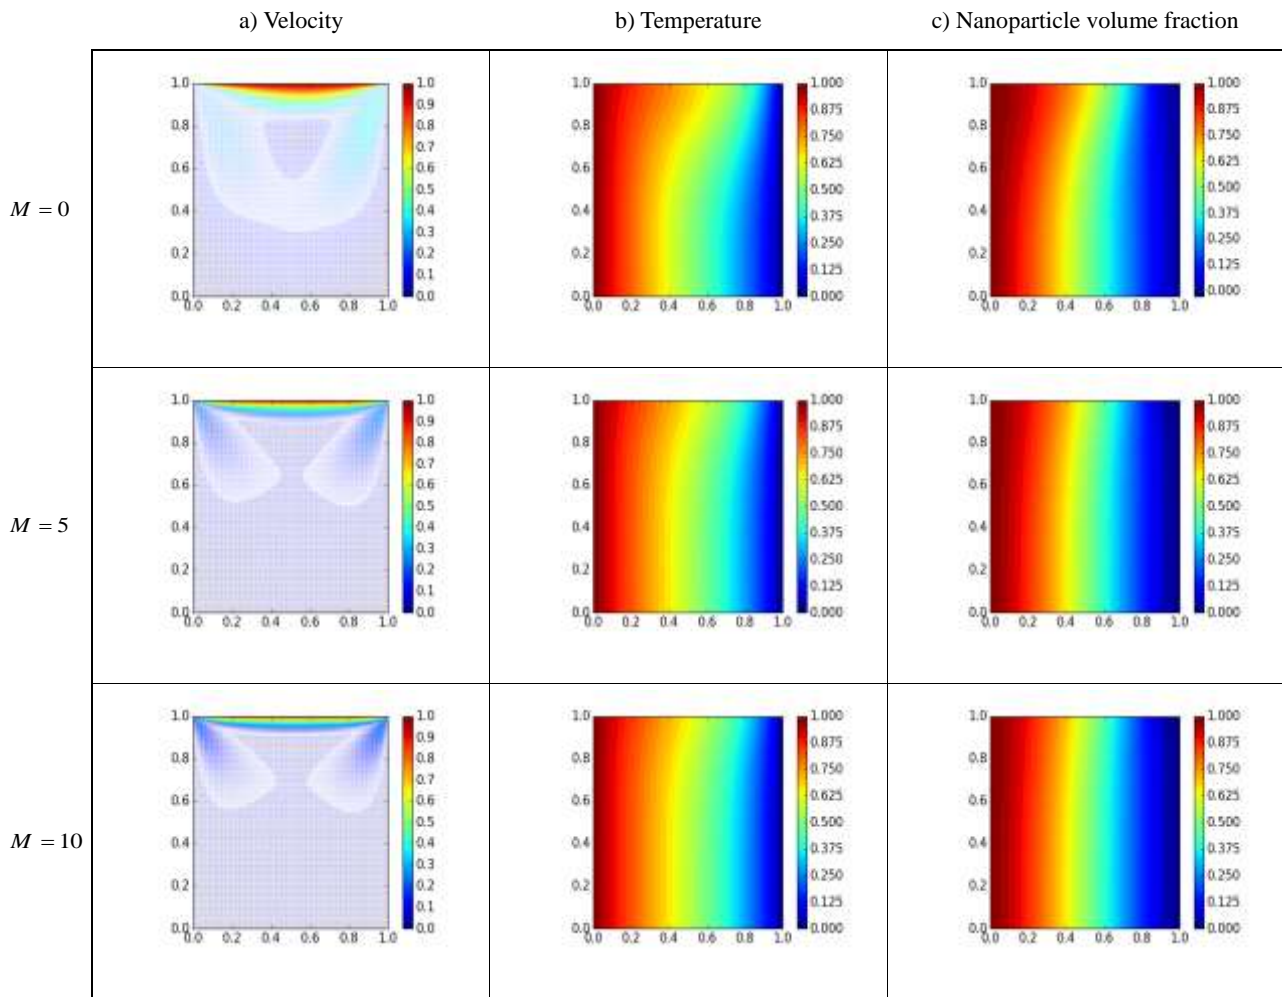


**Fig. 4** Effect of magnetic parameter on a) velocity, b) temperature and c) nanoparticle volume fraction profiles at  $Ri = 1, Pr = 1, Nb = Nt = Nr = 0.1, Le = 1, n = 0.6, Q = -0.2, \kappa = 0.2$

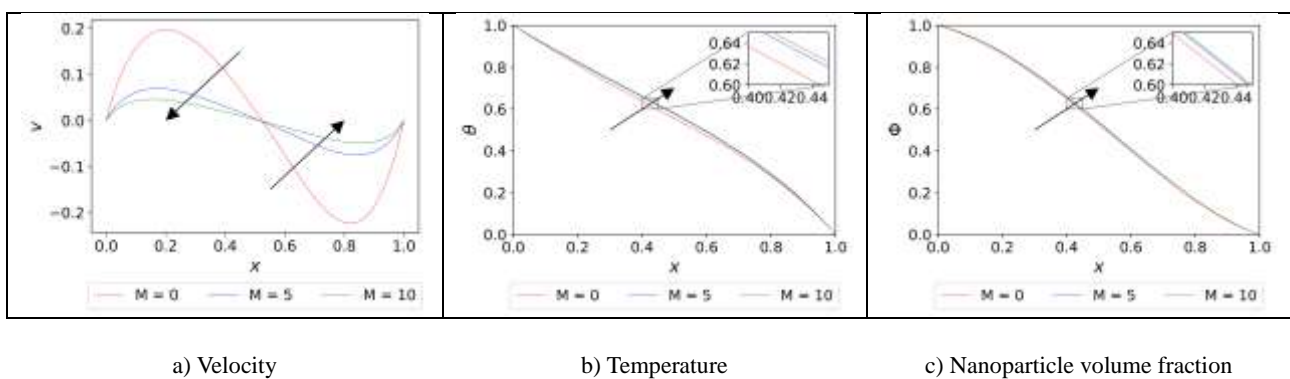


**Fig. 5** Effect of magnetic parameter on a) velocity, b) temperature and c) nanoparticle volume fraction profiles in the middle of cavity ( $y = 0.5$ ) at  $Ri = 1, Pr = 1, Nb = Nt = Nr = 0.1, Le = 1, n = 0.6, Q = -0.2, \kappa = 0.2$




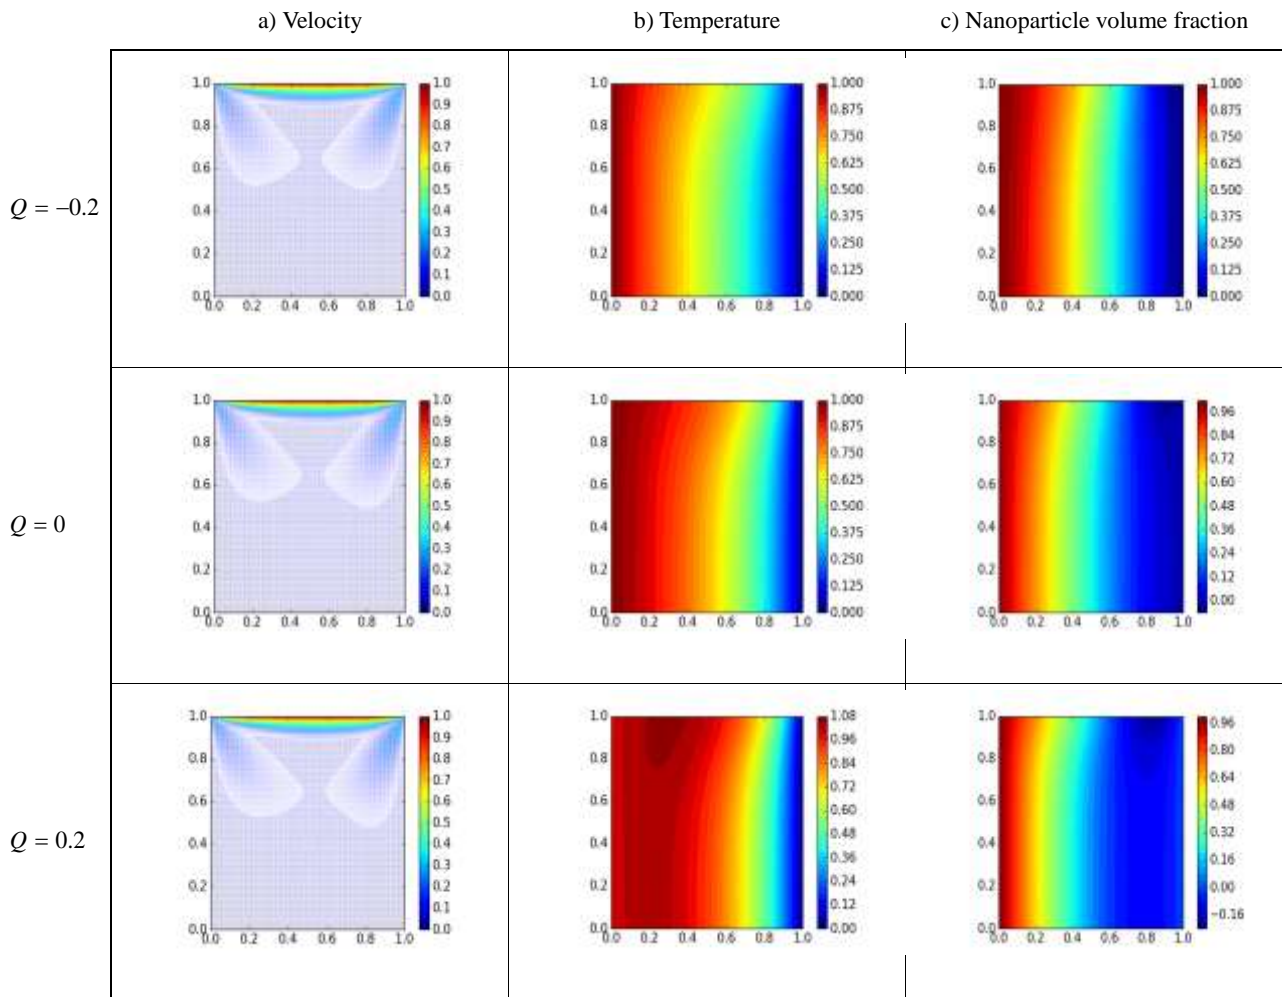


**Fig. 6** Effect of heat generation/absorption parameter  $Q$  on a) velocity, b) temperature and c) nanoparticle volume fraction profiles at  $Ri = 1$ ,  $Pr = 1$ ,  $Nb = Nt = Nr = 0.1$ ,  $Le = 1$ ,  $n = 0.6$ ,  $M = 5$ ,  $\kappa = 0.2$

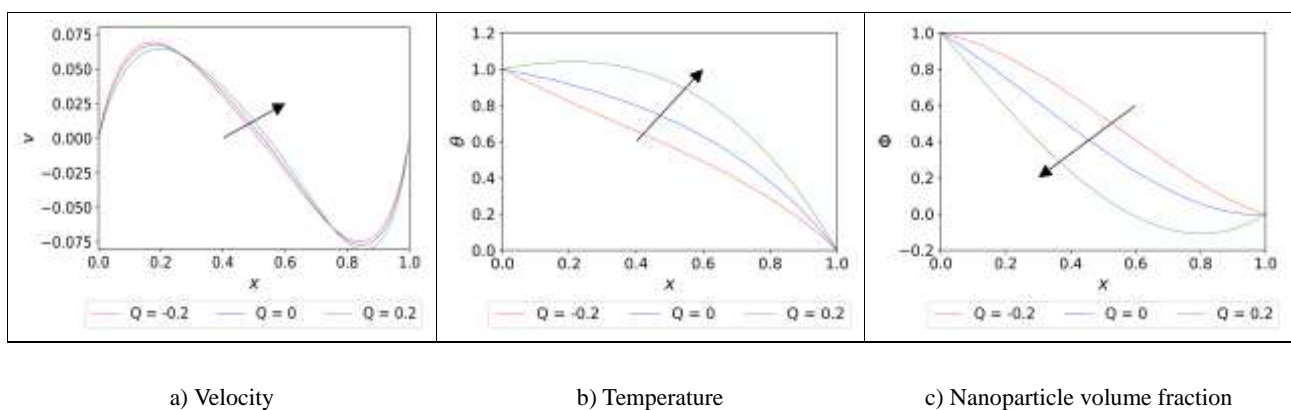

**Fig. 7** Effect of heat generation/absorption parameter  $Q$  on a) velocity, b) temperature and c) nanoparticle volume fraction profiles in the middle of cavity ( $y = 0.5$ ) at  $Ri = 1$ ,  $Pr = 1$ ,  $Nb = Nt = Nr = 0.1$ ,  $Le = 1$ ,  $n = 0.6$ ,  $M = 5$ ,  $\kappa = 0.2$

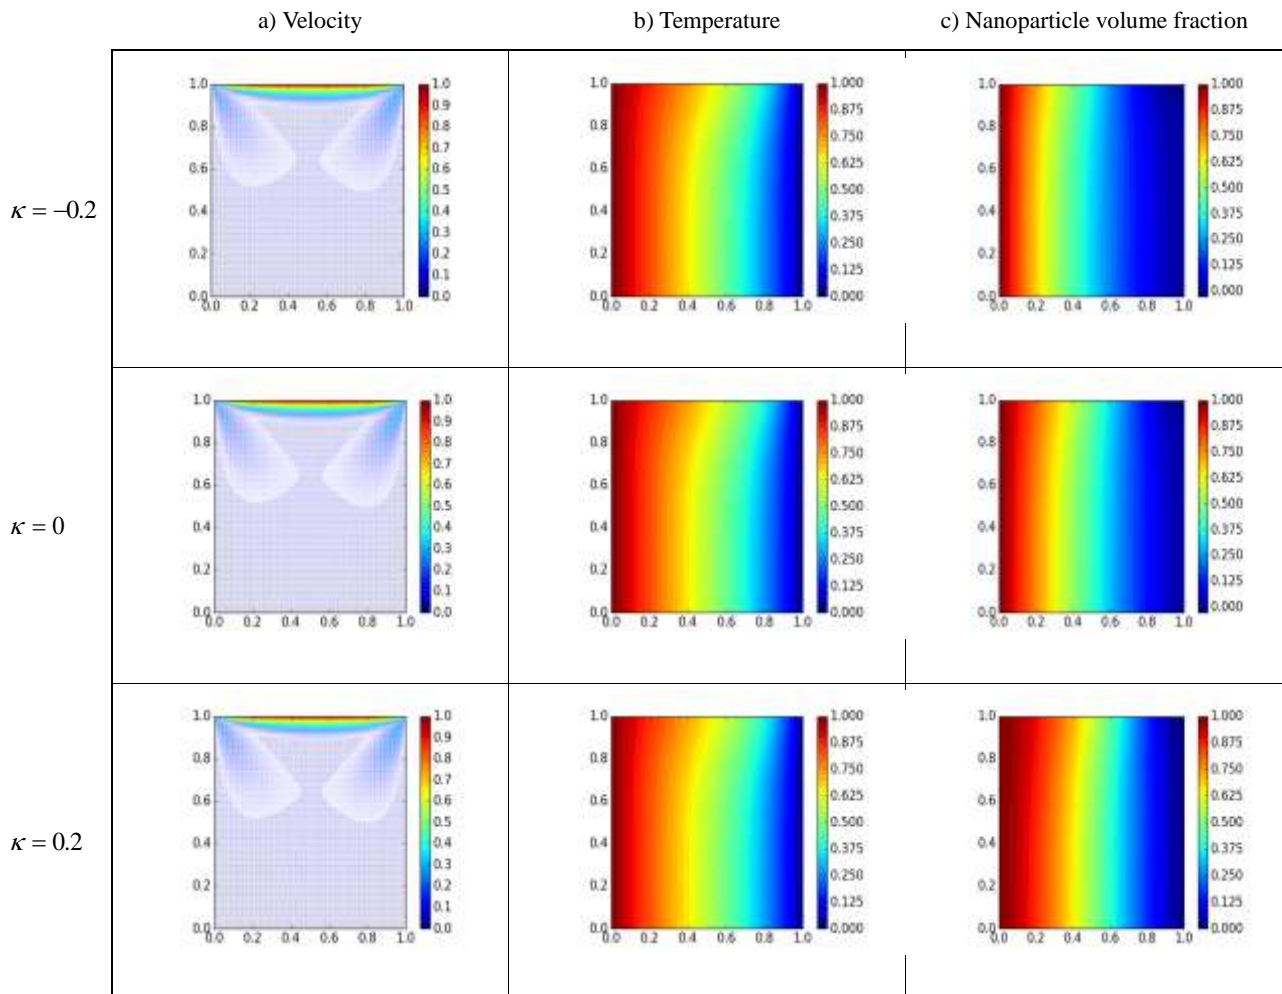

**Fig. 8** Effect of chemical reaction parameter  $\kappa$  on a) velocity, b) temperature and c) nanoparticle volume fraction profiles at  $Ri = 1$ ,  $Pr = 1$ ,  $Nb = Nt = Nr = 0.1$ ,  $Le = 1$ ,  $n = 0.6$ ,  $M = 5$ ,  $Q = -0.2$

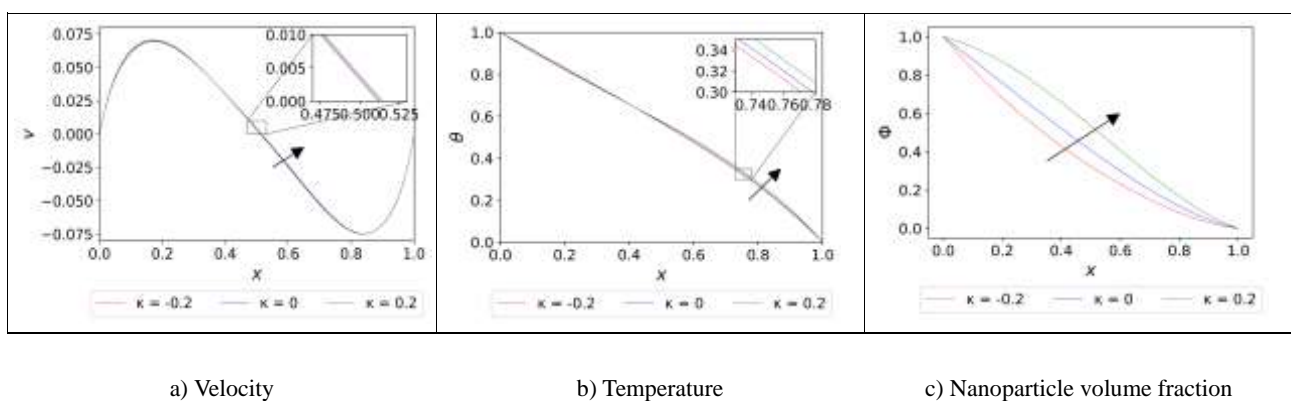

**Fig. 9** Effect of chemical reaction parameter  $\kappa$  on a) velocity, b) temperature and c) nanoparticle volume fraction profiles in the middle of cavity ( $y = 0.5$ ) at  $Ri = 1$ ,  $Pr = 1$ ,  $Nb = Nt = Nr = 0.1$ ,  $Le = 1$ ,  $n = 0.6$ ,  $M = 5$ ,  $Q = -0.2$



## REFERENCES

- [1] Choi, S. U. 1995. Enhancing thermal conductivity of fluids with nanoparticles. *ASME-Publications-FED*, 231, 99-106.
- [2] Buongiorno, J. 2006. Convective transport in nanofluids. *Journal of Heat Transfer*, 128(3), 240-250.
- [3] Tiwari, R. K., & Das, M. K. 2007. Heat transfer augmentation in a two-sided lid-driven differentially heated square cavity utilizing nanofluids. *International Journal of Heat and Mass Transfer*, 50(9), 2002-2018.
- [4] Sheremet, M. A., & Pop, I. 2015. Mixed convection in a lid-driven square cavity filled by a nanofluid: Buongiorno's mathematical model. *Applied Mathematics and Computation*, 266, 792-808.
- [5] Yu, Q., Xu, H., & Liao, S. 2018. Analysis of mixed convection flow in an inclined lid-driven enclosure with Buongiorno's nanofluid model. *International Journal of Heat and Mass Transfer*, 126, 221-236.
- [6] Sheremet, M. A., Pop, I., & Roşca, N. C. 2016. Magnetic field effect on the unsteady natural convection in a wavy-walled cavity filled with a nanofluid: Buongiorno's mathematical model. *Journal of the Taiwan Institute of Chemical Engineers*, 61, 211-222.
- [7] Shekar, C. B., Haritha, C., & Kishan, N. 2019. Magnetohydrodynamic convection in a porous square cavity filled by a nanofluid with viscous dissipation effects. *Proceedings of the Institution of Mechanical Engineers, Part E: Journal of Process Mechanical Engineering*, 233(3), 474-488.
- [8] Elshehabe, H. M., & Ahmed, S. E. 2015. MHD mixed convection in a lid-driven cavity filled by a nanofluid with sinusoidal temperature distribution on the both vertical walls using Buongiorno's nanofluid model. *International Journal of Heat and Mass Transfer*, 88, 181-202.
- [9] Alsabery, A. I., Armaghani, T., Chamkha, A. J., Sadiq, M. A., & Hashim, I. 2019. Effects of two-phase nanofluid model on convection in a double lid-driven cavity in the presence of a magnetic field. *International Journal of Numerical Methods for Heat & Fluid Flow*, 29(4), 1272-1299.
- [10] Anjalidevi, S. P., & Kandasamy, R. 1999. Effects of chemical reaction, heat and mass transfer on laminar flow along a semi infinite horizontal plate. *Heat and Mass Transfer*, 35(6), 465-467.
- [11] Rashad, A. M., Ahmed, S. E., & Mansour, M. A. 2014. Effects of chemical reaction and thermal radiation on unsteady double diffusive convection. *International Journal of Numerical Methods for Heat & Fluid Flow*, 24(5), 1124-1140.
- [12] Mondal, S., & Sibanda, P. 2016. Computational study on convective flows in presence of chemical reaction and thermal radiation in porous/non-porous cavities. *Global Journal of Pure and Applied Mathematics*, 12(4), 3641-3671.
- [13] Zhuang, Y. J., Yu, H. Z., & Zhu, Q. Y. 2017. A thermal non-equilibrium model for 3D double diffusive convection of power-law fluids with chemical reaction in the porous medium. *International Journal of Heat and Mass Transfer*, 115, 670-694.
- [14] Aly, A. M. 2017. Double-diffusive natural convection in a non-darcy porous cavity filled with nanofluid under the effects of chemical reaction. *Journal of Porous Media*, 20(2).
- [15] Rashad, A. M., Ahmed, S. E., Khan, W. A., & Mansour, M. A. 2017. Inclined MHD mixed convection and partial slip of nanofluid in a porous lid-driven cavity with heat source-sink: effect of uniform and non-uniform bottom heating. *Journal of Nanofluids*, 6(2), 368-378.
- [16] Hussain, S., Öztop, H. F., Mehmood, K., & Abu-Hamdeh, N. 2018. Effects of inclined magnetic field on mixed convection in a nanofluid filled double lid-driven cavity with volumetric heat generation or absorption using finite element method. *Chinese journal of physics*, 56(2), 484-501.
- [17] Shekar, C. B., Kishan, N., & Haritha, C. 2016. Convection in nanofluid-filled porous cavity with heat absorption/generation and radiation. *Journal of Thermophysics and Heat Transfer*, 31(3), 549-562.
- [18] Kefayati, G. H. R. 2017a. Simulation of natural convection and entropy generation of non-Newtonian nanofluid in a porous cavity using Buongiorno's mathematical model. *International Journal of Heat and Mass Transfer*, 112, 709-744.
- [19] Kefayati, G. H. R. 2017b. Mixed convection of non-Newtonian nanofluid in an enclosure using Buongiorno's mathematical model. *International Journal of Heat and Mass Transfer*, 108, 1481-1500.
- [20] Kefayati, G. H. R., & Tang, H. 2017. Simulation of natural convection and entropy generation of MHD non-Newtonian nanofluid in a cavity using Buongiorno's mathematical model. *International Journal of Hydrogen Energy*, 42(27), 17284-17327.
- [21] Alnæs, M., Blechta, J., Hake, J., Johansson, A., Kehlet, B., Richardson, A. C., Ring, J., Rognes, M. E., Wells, G. N. 2015. The FEniCS Project Version 1.5. *Archive of Numerical Software*, Vol.3, No.100.
- [22] Kuznetsov, A. V., & Nield, D. A. 2010. Natural convective boundary-layer flow of a nanofluid past a vertical plate. *International Journal of Thermal Sciences*, 49(2), 243-247.
- [23] Sheremet, M. A., & Pop, I. 2015. Mixed convection in a lid-driven square cavity filled by a nanofluid: Buongiorno's mathematical model. *Applied Mathematics and Computation*, 266, 792-808.
- [24] Lin, Y., & Jiang, Y. 2018. Effects of Brownian motion and thermophoresis on nanofluids in a rotating circular groove: A numerical simulation. *International Journal of Heat and Mass Transfer*, 123, 569-582.
- [25] Ibrahim, F. S., Elaiw, A. M., & Bakr, A. A. 2008. Effect of the chemical reaction and radiation absorption on the unsteady MHD free convection flow past a semi infinite vertical permeable moving plate with heat source and suction. *Communications in Nonlinear Science and Numerical Simulation*, 13(6), 1056-1066.
- [26] Das, U. N., Deka, R., & Soundalgekar, V. M. 1994. Effects of mass transfer on flow past an impulsively started infinite vertical plate with constant heat flux and chemical reaction. *Forschung im Ingenieurwesen*, 60(10), 284-287.
- [27] Logg, A., Mardal, K. A., Wells, G. 2012. Automated solution of differential equations by the finite element method: The FEniCS Book, Vol. 84, *Springer Science & Business Media*.
- [28] Iwatsu, R., Hyun, J. M., & Kuwahara, K. 1993. Mixed convection in a driven cavity with a stable vertical temperature gradient. *International Journal of Heat and Mass Transfer*, 36(6), 1601-1608.
- [29] Khanafer, K. M., & Chamkha, A. J. 1999. Mixed convection flow in a lid-driven enclosure filled with a fluid-saturated porous medium. *International Journal of Heat and Mass Transfer*, 42(13), 2465-2481.
- [30] Bakar, N. A., Roslan, R., Karimipour, A., & Hashim, I. 2019. Mixed convection in lid-driven cavity with inclined magnetic field. *Sains Malaysiana*, 48(2), 451-471.